


Cut the  $7\frac{7}{8}$  yards of backing fabric into three  $94\frac{1}{2}$ " x width of fabric (WOF) strips.

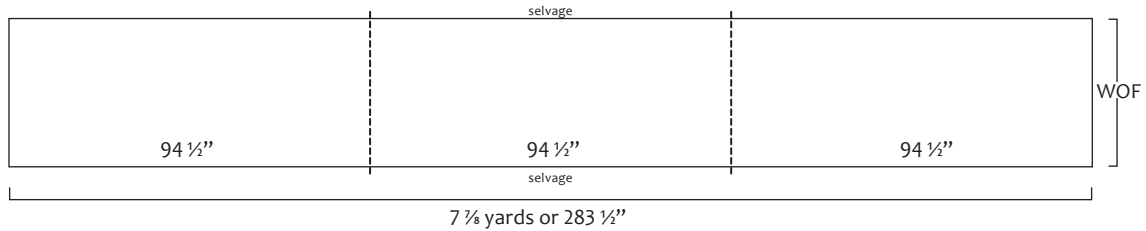

Trim and remove selvages.

Assemble the three backing strips along the long edges using a  $\frac{1}{2}$ " seam allowance.

Backing should measure approximately  $94\frac{1}{2}$ " x 130".

